

Square Trimless Downlight

Square trimless · fire rated · GU10

● ILUM-TS8090-W

○ ILUM-TS8090-B

WHITE FINISH



BLACK FINISH




- Baffle designed to reduce direct glare
- Front bulb replacement

- IP65 — bathroom zones 1, 2 & 3
- Fire rated to 30 / 60 / 90 minutes

GENERAL

Installation	Ceiling / plaster-in
Main material	Pressing metal
Dimensions	126 × 95 mm
Height	55 mm
Cut-out	80 × 80 mm
IP rating	IP65
Class	Class II
Tilt adjustable	No
Glass	Clear
Fire rated	30 / 60 / 90 min

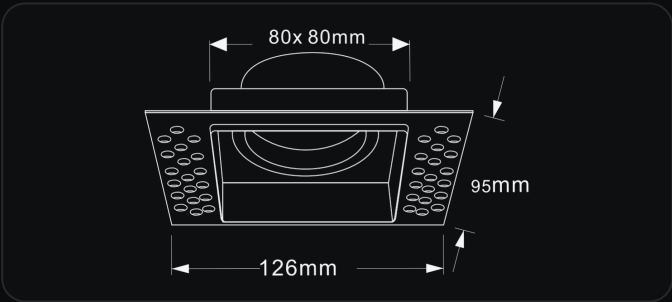

LAMP

Lampholder	GU10 / GU5.3
Source	Halogen / LED
Max wattage	50W / 10W LED

UKCA
UK CONFORMITY

CE
CONFORMITÉ

RoHS
COMPLIANT

IP65
INGRESS

BS 476-21
90-MIN FIRE TESTED


Fire performance tested to BS 476: Part 21 — loadbearing timber floor assembly, up to 90 minutes. Conforms to UKCA marking requirements for sale in Great Britain.

Installation

Square Trimless Downlight · single plaster-in

Page 2 / 2

! Installation by a qualified electrician. **Isolate the mains supply** before fitting. Fit before the final plaster skim for a trimless finish. Class II — double insulated.

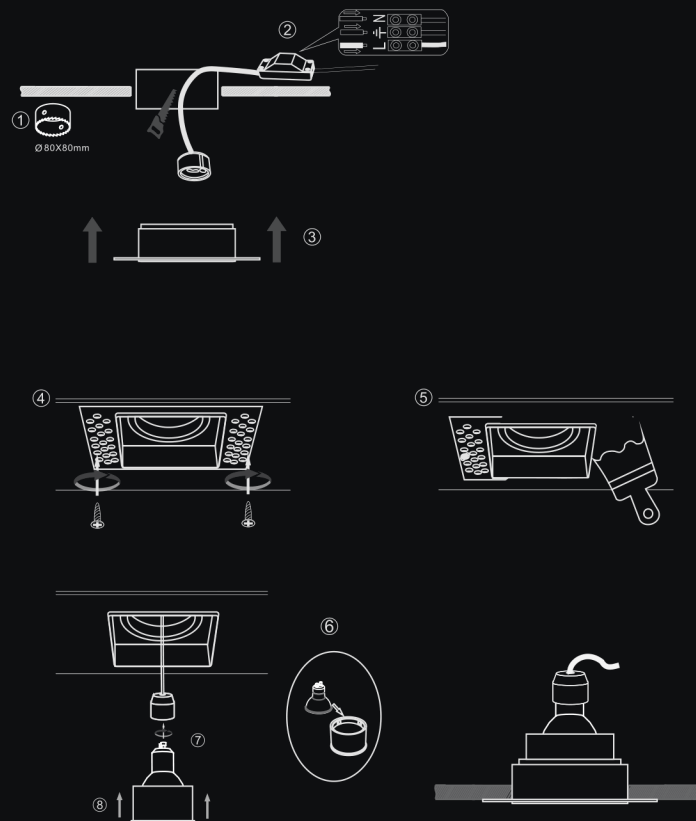

- 1 Mark & cut the aperture**
Cut an 80 × 80 mm hole in the plasterboard ceiling.

- 2 Connect the supply**
With mains isolated, wire Live (L), Neutral (N) & Earth to the terminal block.

- 3 Insert the body**
Push the fixture up through the cut-out until the flange sits flat.

- 4 Fix to the ceiling**
Secure the frame with four screws (not supplied) suitable for the ceiling board.

- 5 Plaster & paint**
Skim over the perforated flange and paint to match for a seamless finish.

- 6 Fit the lamp**
Insert a GU10 / MR16 lamp and push the module fully home until flush.